

# The Stylo Up

/ kW output of 7/14/22/44

/ Certified for outdoor applications

/ Compatible with all AC plugs on the market


/ Available in a single and double cable configuration

/ Current, voltage and over-temperature protective functions

/ Made with heavy gauge metals and industrial grade components



The images shown are for illustration purposes only and may not be an exact representation of the product

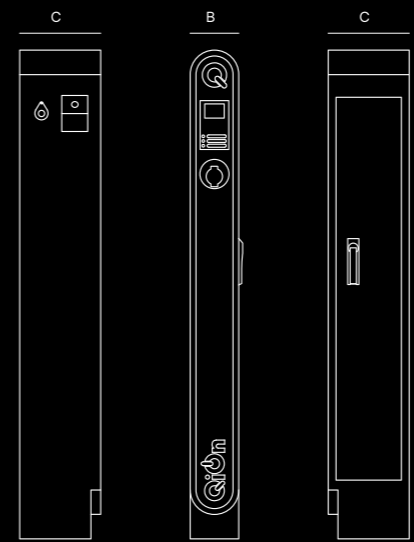

## / Technical Information

**A: Height** 1500mm (58.5")

**B: Width** 150mm (5.8")

**C: Depth** 230mm (8.9")

**Net Weight:** 24Kg (53lb)

**Output Cable Length:** 2.5m (8.3ft)


## / Supported Plugs




NACS



Type 1



Type 2



GB/T

## Output:

**Voltage Output:** AC Single Phase 220V±10% / Three Phase 380±10%

**Current Output:** 32A/50A/64A/80A

**Frequency:** 50/60Hz

**Power Output:** 7/14/22kW

## Technical Features:

**Output Cable Length:** 2.5m / 8.20ft

**Working Temperature:** -30°C+50°C / -22 / 122°F

**Storage Temperature:** -40°C+85°C / -40/185°F

**Operating Humidity:** ≤95%

**Communication Interface:** CAN with standard configuration, Ethernet, 4G

**OCPP:** 1.6/2.0.1

**Enclosure Protection Grade:** Indoor/Outdoor IP54 / IP55

**Communication Protocol:** Qtech Background Protocol

**Emergency Power Off Button:** Yes

**Protective Functionalities:** Over-current Protection, under-voltage/over-voltage protection, residual current, lighting protection, short circuit protection, over-temperature protection, grounding fault protection

**Installation Type:** Floor fixation system

**Charging method:** Plug and Charge/Scan code to Start

**/ Customizable internal components on request**

**Charger configuration must be confirmed at the time of the order. The site of installation may determine configuration options.**