

The Stylo Up

/ kW output of 7/14/22/44

/ Certified for outdoor applications


/ Compatible with all AC plugs on the market

/ Available in a single and double cable configuration

/ Current, voltage and over-temperature protective functions



The images shown are for illustration purposes only and may not be an exact representation of the product

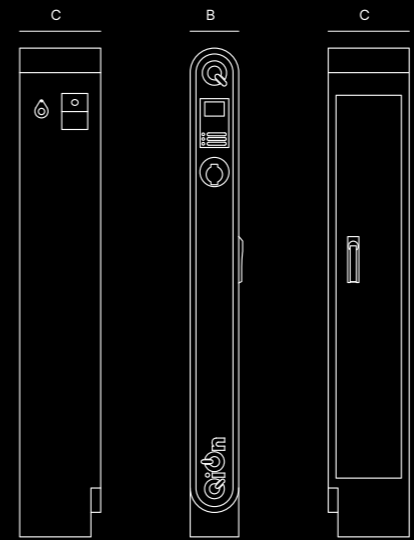

/ Technical Information

A: Height 1500mm (58.5")

B: Width 150mm (5.8")

C: Depth 230mm (8.9")

Net Weight: 24Kg (53lb)


Cable Length: 2.5m (8.3ft)

SINGLE CABLE


/ Supported Plugs




NACS



Type 1



Type 2



GB/T

Output:

Voltage Output: AC Single Phase 220V±10% / Three Phase 380±10%

Current Output: 32A/50A/64A/80A

Frequency: 50/60Hz

Power Output: 7/14/22kW

Technical Features:

Cable Length: 2.5m / 8.20ft

Working Temperature: -30°C+50°C / -22 / 122°F

Storage Temperature: -40°C+85°C / -40/185°F

Operating Humidity: ≤95%

Communication Interface: CAN with standard configuration, Ethernet, 4G

OCPP: 1.6/2.0.1

Enclosure Protection Grade: Indoor/Outdoor **IP54 / IP55**

Communication Protocol: Qtech Background Protocol

Emergency Power Off Button: Yes

Protective Functionalities: Over-current Protection, under-voltage/over-voltage protection, residual current, lighting protection, short circuit protection, over-temperature protection, grounding fault protection

Installation Type: Floor fixation system

Charging method: Plug and Charge/Scan code to Start

/ Customizable internal components on request